


LEOK-21 Optical Fiber Information and Communication Experiment Kit - Complete Model

- 11 fundamental experiments
- Flexible solution for different levels of students
- Hands-on skill training
- Innovative design with quality components

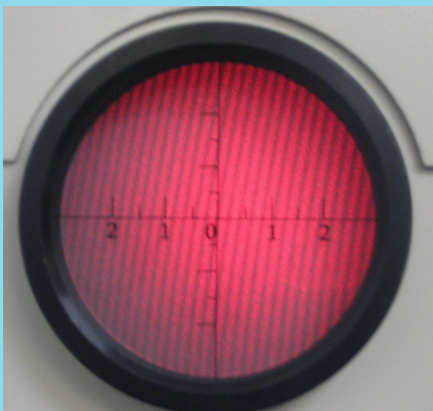

Interference pattern on ground glass screen

This kit provides an overview of fiber optic technology and basic skills needed to work with fiber optics. It is made up of a number of laboratory experiments. The most commonly used fiber optical components and their parameter measurements are introduced in this kit. Upon completing the experiments, one can gain a better understanding of fiber optic fundamentals with hands-on experience in real fiber optic components and techniques. With this carefully designed kit, students will gain a powerful tool to explore the exciting world of fiber communication. This kit is really a must for those wishing to learn fiber optics with related techniques.

Experimental Contents

1. Fundamentals of fiber optics
2. Optical fiber coupling
3. Numerical aperture (NA) of a multimode fiber
4. Optical fiber transmission loss
5. M-Z optical fiber interference
6. Optical fiber temperature sensing principle
7. Optical fiber pressure sensing principle
8. Optical fiber beam splitting
9. Variable optical attenuator (VOA)
10. Optical fiber isolator
11. Visual inspection and fault locating using OTDR

Part List

Description	Part No./Specs	Qty
He-Ne laser	LLL-2 (2.5 mW@632.8 nm)	1
Handheld light source	1310/1550 nm	1
Light power meter	LLM-2	1
Handheld light power meter	1310/1550 nm	1
Fiber interference demonstrator	Includes following parts:	1
<i>Fiber splitter</i>	633 nm	1
<i>Temperature controller</i>		1
<i>Stress controller</i>		1
<i>5-axis adjustable stage</i>		1
<i>Beam expander</i>	$f = 4.5 \text{ mm}$	1
<i>Fiber clip</i>		2
<i>Fiber support</i>		1
<i>White screen</i>	With crosshairs	1
<i>Laser holder</i>	SZ-42	1
<i>Alignment aperture</i>		1
Power cord		3
Single-mode beam splitter	1310 nm or 1550 nm	1
Optical isolator	1310 nm or 1550 nm	1
Variable optical attenuator		1
Single-mode fiber	633 nm (FC/PC connector on one end)	1 m
Multi-mode fiber	633 nm	2 m
Fiber spool	1 km (9/125 μm bare fiber)	1
Fiber patch cord	1 m/3 m/50 m	4/1/1
Hand held OTDR with VFL	OTDR: 1550 nm, VFL: 1 mW, 650 nm	1
Fiber stripper		1
Fiber scribe		1
Mating sleeves		5

He-Ne Laser with Power Supply

Model: Lambda Scientific LLL-2

Wavelength: 632.8 nm

Mode & output power: TEM₀₀ ≥ 2.5 mW

Polarization: Linear polarization 500:1

Beam divergence: 1.3 mrad full angle


Beam diameter: 0.63 mm at 1/e² point

Tube: length 270 mm and diameter 42 mm

High voltage: 1900 VDC/6.5mA, Alden HV connector

Power supply: 100—240 VAC, 50/60 Hz

Dimensions: 190mm x 80mm x 160mm.

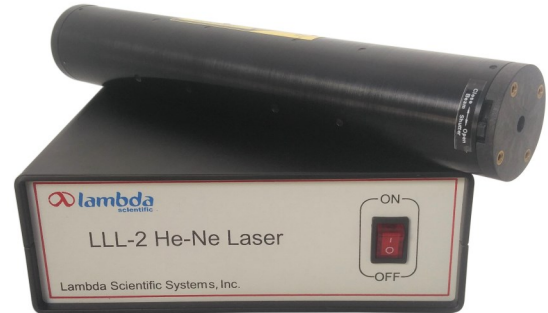

Dual-wavelength Handheld Light Source

Wavelengths: 1310 nm/1550 nm

Output power: ≥ -7 dBm

Spectral width: < 10 nm

Optical connector: 2.5mm FC connector

Stability: ±0.05 dB/15 minutes or ±0.1 dB/8 hours

Modulation frequencies: 0/270/1k/2k Hz

Power supply: 2x AA 1.5V battery

Operating temperature: -10 to 50 °C

Dimensions: 180mm x 89mm x 42mm

Light Power Meter

Model: Lambda Scientific LLM-2

Measurement range: 2 μW ~ 200 mW, 6 scales

Display: 4-digi LED display

Sensor type: silicon detector (300 ~ 1100 nm)

Sensor area: 10mm x 10mm

Power supply: 100—240 VAC, 50/60 Hz

Dimensions: 250mm x 200mm x 90mm



Handheld Light Power Meter

Calibrated wavelengths: 1310 nm/1550 nm

Response range: 850 ~ 1650 nm

Detector type: InGaAs

Measurement range : -50 ~ +26 dBm

Optical connector: 2.5mm FC Connector

Accuracy: ±0.2 dB

Power supply: 2x AA 1.5V battery

Dimensions: 180mm x 90mm x 42mm

Fiber Interference Demonstrator

Dimensions 350 x 300 x 210 mm. Includes following parts:

- (1) 633 nm fiber beam splitter with FC input connector
- (2) 20W heater with temperature sensor
- (3) mounted collimating reflective mirror f175mm
- (4) 15 mm travel at 0.01 mm resolution micrometer
- (5) diameter 60mm ground glass viewing screen
- (6) 80mm x 80mm with cross scales white screen
- (7) alignment aperture
- (8) fiber holders
- (9) fiber coupling objective lens 5x
- (10) PID temperature controller
- (11) x-y translation stage
- (12) x-y-z translation stage
- (13) Power supply: 100—240 VAC, 50/60 Hz



Single-mode Fiber (633 nm)



Operating wavelength: 633 nm

Length: 1m

Connector type: FC/PC, one end only

Core diameter: 4.3 μm

Cladding diameter: 125 μm

Coating diameter: 250 μm

Numerical aperture: 0.10-0.14,

Cutoff wavelength: 500-600 nm.

Multi-mode Fiber (633 nm)

Operating wavelength: 633 nm

Length: 2m

Connector type: FC/PC, both ends

Core diameter: 9 μm

Cladding diameter: 125 μm

Insertion loss: <0.3 dB

Return loss: >50 dB



Fiber Patch Cord (1310/1550 nm)

Operating wavelength: 1310/1550 nm
 Length: 1m (4 pcs), 3m (1 pc), 50m (1pc)
 Connector type: FC/PC
 Core diameter: 9 μm
 Cladding diameter: 125 μm
 Cable diameter: 2.0 mm
 Insertion loss: <0.3 dB
 Return loss: >50 dB



Fiber Spool

Operating wavelength: 1310/1550 nm
 Length: 1000 m
 Connector type: bare fiber, no connector
 Core diameter: 9 μm
 Cladding diameter: 125 μm

Single Mode Fiber Splitter

Operating wavelength: 1310 or 1550 nm
 Dimensions: 2.0 mm diameter or 80 x 20 mm
 Connector type: FC/PC
 Insertion loss: < 0.35 dB
 Polarization-dependent loss: 0.02~0.03 dB




Optical Isolator

Operating wavelength: 1550 nm (1 pc) and 1310 nm (1 pc)
 Polarization sensitivity: insensitive
 Stage number: single stage
 Connector type: FC/PC
 Bandwidth: +/-30 nm
 Max insertion loss: 0.7 dB
 Minimum isolation: 30 dB (typical 40 dB)
 Minimum return loss: 55/50 dB



Variable Optical Attenuator

Range: 1~60 dB, FC/PC connector
 Single mode fiber/length 1 m
 Wavelength range 1290 nm ~ 1625 nm
 Insert loss <1.5 dB, return loss > 55dB without connectors
 Max power 300 mW,
 Attenuation precision <0.2 dB @ 10 dB & <0.3 dB @10-45 dB.

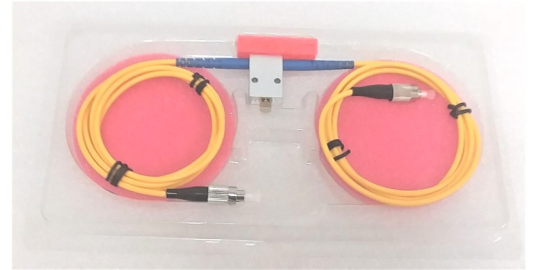

Tip material: carbide
 Tip angle: 45°

Fiber Scribe

Fiber Stripper

For stripping 125um fiber with 250um buffer coating



Connector type: FC/PC
 Insertion loss: <0.2 dB

Mating Sleeves

Hand Held OTDR with VFL

Hand held optical time domain reflectometer (OTDR):
 Single mode fiber, FC/PC, light source 1550 nm, dynamic range 18 dB,
 Measurement range 40 km, pulse width 10 ns ~ 10 us, attenuation dead zone
 10 m, event dead zone 3 m. Sampling points 40000. Data storage 50.
 Visual Fault Locator (VFL): Light source 1 mW 650 nm.
 Powered by Li rechargeable battery. Type-C USB charger.
 Dimensions: 175 mm x 90 mm x 45 mm.

